





The Multi Belt is a strong straight running eye-link conveyor belt for food -and industrial applications. The belt is with two cross wires which gives extra stability and can be designed with a number of rows reinforcement links, side chain, flights, side guards etc. to satisfy the most demanding applications.

The Multi Belt is constructed with special regard to the demands of the food industry and is EASY TO CLEAN with its totally plane and smooth open surface. To make our Belt unique DKTransportbaand is also making the Multi Belt with side chain which gives strength and a precise positive drive to the belt.




Multi Belt

Eg. with 10mm hook distance




Multi Belt

Eg. with 21mm hook distance and sidechain Ø12mm rollers



Multi Belt

Eg. with 7,5mm hook distance and sideplates

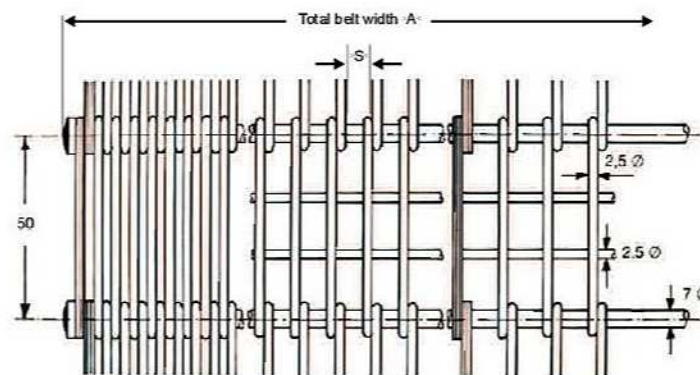

Type specification: 50-2,5/S-7-H-Multi (e.g. 50-2,5/7,5-7-0 Multi)

S: hook distance from 3,3mm and up

Standard rod: Ø5,0mm or Ø7,0mm

Standard material: SS304, SS316 or Carbon Steel

Sprockets: See page 18-19



Welded Stainless steel rods



The Multi Belt is a strong and reliable belt. Contact our sales department for calculations of allowable strenght etc.

Multi Belts

